



## X-PROSERVER

### X-PROSERVER OPTIONS

- 4 Channel 25 fps
- 8 Channel 50fps
- 8 Channel 200 fps
- 16 Channel 50 fps
- 16 Channel 100fps
- 16 Channel 200 fps
- 16 Channel 400 fps
- 20 Channel 100 fps
- 20 Channel 200fps
- 32 Channel 100 fps
- 32 Channel 200 fps
- 32 Channel 400 fps

### HARD DRIVE SIZE OPTIONS

- 640 GB HDD
- 960 GB HDD
- 1280GB HDD
- 640 GB HDD
- 960 GB HDD
- 1280GB HDD
- 1.6 TB HDD
- 2.0 TB HDD

Only 100% duty cycle hard disk drive

### VGA FLAT SCREEN MONITOR OPTIONS

- 17" (VIG/17"VGAFT)
- 19" (VIG/19"VGAFT)
- 21" (VIG/21"VGAFT)

Wall mount monitor bracket


Larger screens available on request

### LCD FLAT SCREEN MONITOR C/W BNC OPTIONS

- 17" (VIG/17"LCD/BNC)
- 19" (VIG/19"LCD/BNC)

Wall mount monitor bracket

Larger screens available on request

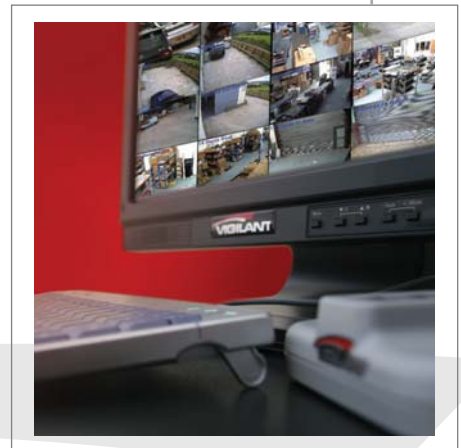

### UN-INTERRUPTIBLE POWER SUPPLY

- UPS-650

- USB PTZ CONTROLLER



# VIG/32/200/2000

## SPECIFICATION



## FEATURES

<b>Camera inputs</b>	32 channel
<b>Frame rate for monitoring</b>	Live display - 200fps(PAL)
<b>Frame rate for recording</b>	Max. 200 fps (PAL)
<b>Compression algorithm</b>	MJPEG, M-MPEG (Selectable)
<b>Image size (resolution)</b>	NTSC 320x240, 640x240, 640x480
<b>PAL</b>	352x288, 704x288, 720x576
<b>System CPU</b>	P4-3.2GHz
<b>System Memory</b>	1024MB
<b>HDD Size</b>	2000GB
<b>Analog Video out put</b>	Yes
<b>No. of sensor input</b>	32 channel
<b>No. of alarm output</b>	4 channel
<b>P/T/Z Camera control</b>	Yes
<b>Network for remote</b>	TCP/IP based network, LAN, PSTN, ISDN
<b>Remote control</b>	Setting, Display control, Relay output, P/T/Z camera
<b>Remote transmission</b>	View, playback, notification
<b>Watchdog</b>	Yes
<b>Time date stamp</b>	Yes
<b>Multi users control</b>	Yes (by registration)
<b>Sound record</b>	5 channel
<b>Image Authentication</b>	Yes
<b>Data back up</b>	DVD, DAT, HDD, CD-RW,Lan
<b>Case</b>	Rackmount case
<b>Operation System</b>	Windows XP