

## X-PROSERVER

Vigilant X-Pro Server is simple,  
powerful & flexible.

From small systems to large  
enterprise systems the X-Pro

Server provides simple

convenience with an easy to use

intuitive interface, Vigilant X-Pro


Server is available in 4/8/16/20

and 32 channel solutions.



### KEY FEATURES

- FULL PENTAPLEX OPERATION (LIVE, PLAYBACK, REMOTE VIEWING, RECORD, & BACK UP SIMULTANEOUSLY)
- MPEG 4 COMPRESSION
- TCP/IP CONTROL THROUGH REMOTE SOFTWARE (SUPPLIED WITH BUILT IN DVR-RW)
- BUILT IN DVD-RW
- MULTIPLE PICTURE QUALITIES AND RESOLUTIONS
- BUILT IN MOTION DETECTION
- NETWORK READY
- SINGLE OR MULTI CHANNEL AUDIO SUPPORT
- PTZ CONTROL
- FULL TECHNICAL SUPPORT AND ENGINEER TRAINING
- MANUFACTURED IN THE UK.

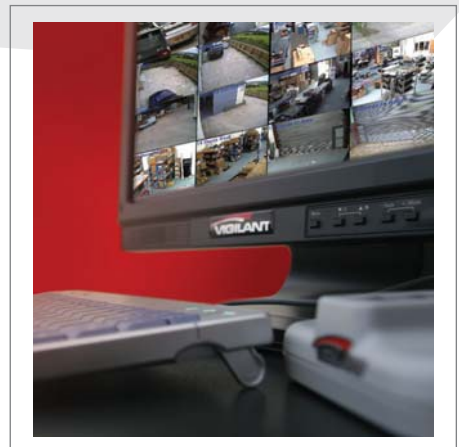

## X-PROSERVER

### X-PROSERVER OPTIONS

- 4 Channel 25 fps
- 8 Channel 50fps
- 8 Channel 200 fps
- 16 Channel 50 fps
- 16 Channel 100fps
- 16 Channel 200 fps
- 16 Channel 400 fps
- 20 Channel 100 fps
- 20 Channel 200fps
- 32 Channel 100 fps
- 32 Channel 200 fps
- 32 Channel 400 fps

### HARD DRIVE SIZE OPTIONS

- 640 GB HDD
- 960 GB HDD
- 1280GB HDD
- 640 GB HDD
- 960 GB HDD
- 1280GB HDD
- 1.6 TB HDD
- 2.0 TB HDD

Only 100% duty cycle hard disk drive

### VGA FLAT SCREEN MONITOR OPTIONS

- 17" (VIG/17"VGAFT)
- 19" (VIG/19"VGAFT)
- 21" (VIG/21"VGAFT)

Wall mount monitor bracket

Larger screens available on request

### LCD FLAT SCREEN MONITOR C/W BNC OPTIONS

- 17" (VIG/17"LCD/BNC)
- 19" (VIG/19"LCD/BNC)

Wall mount monitor bracket

Larger screens available on request



### UN-INTERRUPTIBLE POWER SUPPLY

- UPS-650

- USB PTZ CONTROLLER



# VIG/32/400/2000

## SPECIFICATION



## FEATURES

|                                  |  |
|----------------------------------|--|
| <b>Camera inputs</b>             | 32 channel   |
| <b>Frame rate for monitoring</b> | Live display - 800fps(PAL)                           |
| <b>Frame rate for recording</b>  | Max. 400 fps (PAL)                                   |
| <b>Compression algorithm</b>     | MJPEG, M-MPEG (Selectable)                           |
| <b>Image size (resolution)</b>   | NTSC 320x240, 640x240, 640x480                       |
| <b>PAL</b>                       | 352x288, 704x288, 720x576                            |
| <b>System CPU</b>                | P4-3.6GHz  |
| <b>System Memory</b>             | 1024MB   |
| <b>HDD Size</b>                  | 2000GB   |
| <b>Analog Video out put</b>      | Yes  |
| <b>No. of sensor input</b>       | 32 channel   |
| <b>No. of alarm output</b>       | 4 channel  |
| <b>P/T/Z Camera control</b>      | Yes  |
| <b>Network for remote</b>        | TCP/IP based network, LAN, PSTN, ISDN                |
| <b>Remote control</b>            | Setting, Display control, Relay output, P/T/Z camera |
| <b>Remote transmission</b>       | View, playback, notification                         |
| <b>Watchdog</b>                  | Yes  |
| <b>Time date stamp</b>           | Yes  |
| <b>Multi users control</b>       | Yes (by registration)                                |
| <b>Sound record</b>              | 5 channel  |
| <b>Image Authentication</b>      | Yes  |
| <b>Data back up</b>              | DVD, DAT, HDD, CD-RW,Lan                             |
| <b>Case</b>                      | Rackmount case                                       |
| <b>Operation System</b>          | Windows XP   |