

MIDI PRO NVR SERIES

The Vigilant Midi-Pro DVR SERIES

is simple, powerful & flexible.

The Midi-Pro is specifically designed for small to medium sized systems.

Vigilant Midi – Pro SERIES

provides simple convenience, with an easy to use intuitive interface.

we provide the midi-pro series in 4 channel 9 channel and 16 channel solutions.



KEY FEATURES

- FULL PENTAPLEX OPERATION (LIVE, PLAYBACK, REMOTE VIEWING, RECORD, & BACK UP SIMULTANEOUSLY)
- H-264/M-PEG 4 + M-JPEG COMPRESSION
- TCP/IP CONTROL THROUGH REMOTE SOFTWARE (SUPPLIED WITH EVERY DVR)
- BUILT IN DVD-RW
- MULTIPLE PICTURE QUALITIES AND RESOLUTIONS
- BUILT IN MOTION DETECTION
- NETWORK READY
- SINGLE OR MULTI CHANNEL AUDIO SUPPORT CASH REGISTER (POS INTERFACING)
- CENTRAL STATION ENABLED*(CONTACT US FOR REGISTERED STATIONS)
- FULL TECHNICAL SUPPORT AND ENGINEER TRAINING
- MANUFACTURED IN THE UK.



MIDI PRO NVR SERIES

MIDI PRO SERIES OPTIONS

- 4 channel 25fps
- 9 channel 50fps
- 16 channel 100fps
- 16 channel 200fps

HARD DRIVE SIZE OPTIONS

- 250 Gb HDD
- 500 Gb HDD
- 1 Tb HDD
- 2 Tb HDD
- Only 100% duty cycle hard disk drive associated system devices

VGA FLAT SCREEN MONITOR OPTIONS

- 17" (VIG/17"VGAFT)
- 19" (VIG/19"VGAFT)
- 21" (VIG/21"VGAFT)

Wall mount monitor bracket

Larger screens available on request

LCD FLAT SCREEN MONITOR C/W BNC OPTIONS

- 17" (VIG/17"LCD/BNC)
- 19" (VIG/19"LCD/BNC)


Wall mount monitor bracket

UN-INTERRUPTIBLE POWER SUPPLY

- UPS-650


- USB PTZ CONTROLLER

Easy change external power supply

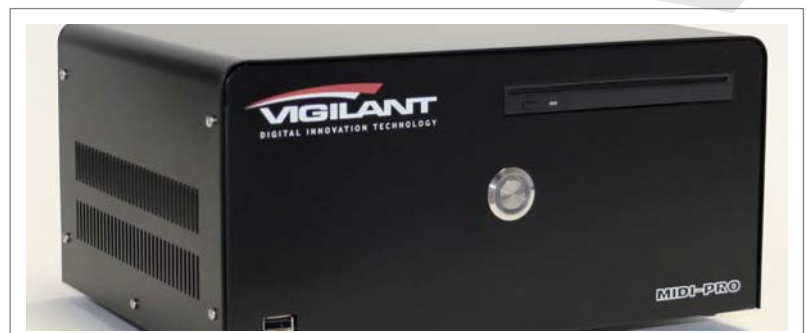

MIDI PRO

SPECIFICATION

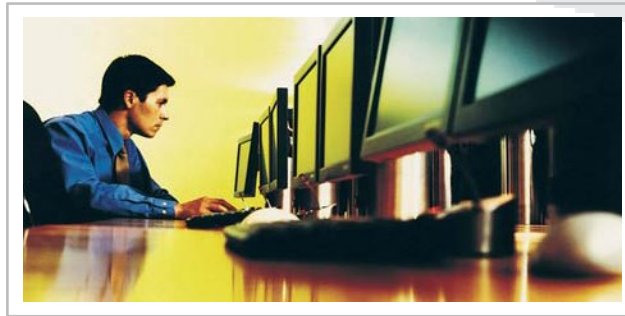

FEATURES

Camera inputs	1-8 channel IP
Frame rate for monitoring	Display - 25fps-200fps(PAL)
Frame rate for recording	Max. 25 fps-200fps(PAL)
Compression algorithm	M-Jpeg ,M-Mpeg ,H-264 (Selectable)
Image size (resolution)	NTSC 320x240, 640x240, 640x480
PAL	352x288, 704x288, 720x576
System CPU	Intel Dual Core
System Memory	1024 mb (2048 mb 200fps only)
HDD Size	250gb-2 Tb
Analog Video out put	Nb
No. of sensor input	1-8 channel
No. of alarm output	8 channel
P/T/Z Camera control	Yes
Network for remote	TCP/IP based network, LAN, PSTN, ISDN
Remote control	Setting, Display control, Relay output, P/T/Z camera
Remote transmission	View, playback, notification
Watchdog	Yes
Time date stamp	Yes
Multi users control	Yes (by registration)
Sound record	2-8 channel
Image Authentication	Yes
Data back up	DVD,CD-RW,LAN,USB
Case	Desktop type case
Operation System	Windows Xp Embedded
Dimensions	W 290mm D 215mm H 135mm
Power	50w-90w
Heat Output	1.7 BTU@ 50w – 3BTU @ 90w